Directions For Use


Z-Slider™ Point-Of-Use Clear Wall Holder

Reorder No. 2104-H

OPTION A: Screws and Plastic Anchors

- Place the Holder up against the wall where desired.
- Mark the center of the three mounting holes on the wall, then remove the Holder.
- 3. At the mounting hole marks, drill three 1 inch deep holes using a 3/16" drill bit.
- 4. After the holes are drilled, use a hammer to insert the plastic anchors into the wall
- Place the holder into position aligned with the anchors, then screw the flathead screws until snug.


WARNING: Do not over tighten screws

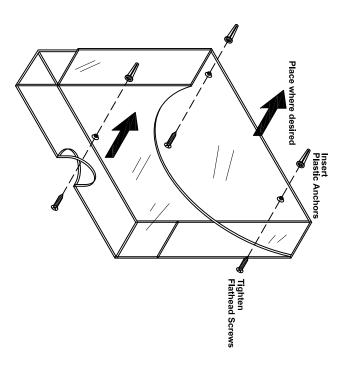

Sandel Medical Industries recommends using Screws and Anchors. NOTE: For Low Surface Energy walls or porous textured walls

OPTION B: Double Sided Adhesive Tape

- 1. Remove the paper backing from one side of the tape
- 2 Apply the tape approximately 2 1/2" from each edge.
- 3. Remove the paper backing from the other side of the tape.
- 4. Place the Holder up against the wall where desired.
- Firmly press the Holder against the wall.
- WARNING: Damage to painted surface may occur upon removal.

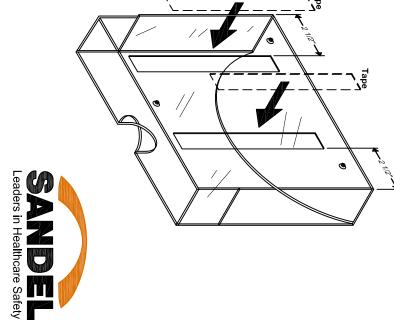

19736 Dearborn Street, Chatsworth, CA 91311 USA 1-818-534-2500 www.sandelmedical.com Sandel Medical Industries, LLC