

HyFlex® 11-842

CARBON FOOTPRINT FACT SHEET

Standards used for LCA
ISO 14040:2006, ISO 14044:2006

System boundary: Cradle-to-gate.

Cradle-to-gate refers to assessing the environmental impact of a product from the extraction of raw materials until it leaves the manufacturing facility, including the transport of products to warehouses, without considering its use or disposal.



Total carbon footprint per pair: 0.44 kg CO₂e*

The graph below represents the carbon footprint breakdown of the product.

4.30%
Packaging

Packaging includes all materials used to contain, protect, and transport the product.

19.70%
Manufacturing


Process of turning raw materials into finished goods, which uses energy and water, and generates waste.

3.80%
Distribution

Transportation of the product from the manufacturing site to the main warehouse.

72.20%
Raw Materials

Basic materials from which the product is made.

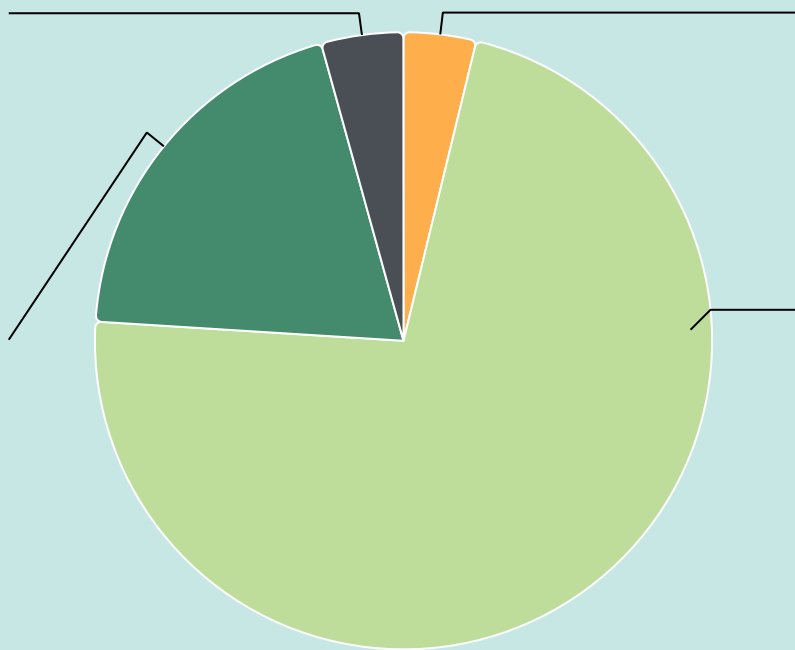

KEY TAKEAWAYS

- Raw Materials is the largest contributor: 72.2%**
- Manufacturing is the second-biggest contributor: 19.7%**
- Since our data suggests that raw materials and manufacturing are major contributors to HyFlex® 11-842 's carbon footprint, we invest heavily in optimizing these areas.**

REFERENCES: ¹Ansell, 2023, Product Specifications, ²2024 Sustainability Report, ISO 14064-1:2018 external audit by Control Union; ref period: 7/2023 - 6/2024, ³Intertek, Zero Waste to Landfill certification, ⁴SGS ISO Certificates, ⁵Ansell, 2023, Product and Packaging Specifications, ⁶Ansell, 2023, Product and Packaging Specifications, ⁷Ansell, 2023, Product and Packaging Specifications, ⁸Ansell, 2023, Sustainable Packaging Program. Ansell Life Cycle Assessment, cradle-to-grave, 2020 (based on baseline cradle-to-grave model using company-specific foreground data foreground data w/ ecoinvent® v3.7 cut-off database background), ReCiPe 2016 Egalitarian LCIA Method). Independent peer review, 2021., ⁹Ansell, 2023, Product and Packaging Specifications, ¹⁰Ansell, 2023, Sustainable Packaging Program, ¹¹Claim Data Source

*Based on glove sizes used in the LCA.

The product carbon footprint assessment was done in accordance with the ISO 14040:2006 and ISO 14044:2006 standards and critically reviewed by an external party. Calculation method: IPCC 2021 GWP 100a. Software: SimaPro, Ecoinvent 3.8 database. System boundary: cradle-to-gate. The results may change depending on variations in data collection periods and assumptions within the model and system boundary. None of the information included in this report shall be interpreted as a legally binding proposal.

COPYRIGHT: Ansell, ® and TM are trademarks owned by Ansell Limited or one of its affiliates. © 2024 Ansell Limited. All Rights Reserved.

WARNING: No glove provides complete protection against cuts, abrasions, punctures or chemicals. Users should test the suitability of Ansell products for a particular purpose, for use within a particular environment or against particular chemicals. See > for additional information.