


## Chemical splash-resistant disposable gloves for food processing and heavy-duty jobs

- **Reliable chemical splash protection:** TouchNTuff® 92-670 disposable gloves offer strong protection against chemical splashes
- **Tough durability:** The robust, proprietary nitrile minimizes the risk of tears during heavy-duty jobs
- **Elevated comfort:** Their soft material provides high levels of comfort during long shifts
- **Food handling compliance:** TouchNTuff® 92-670 are food handling-compliant, ensuring practical use in a variety of food contact scenarios
- **Enhanced grip:** Textured fingertips help wearers securely grip tools and equipment

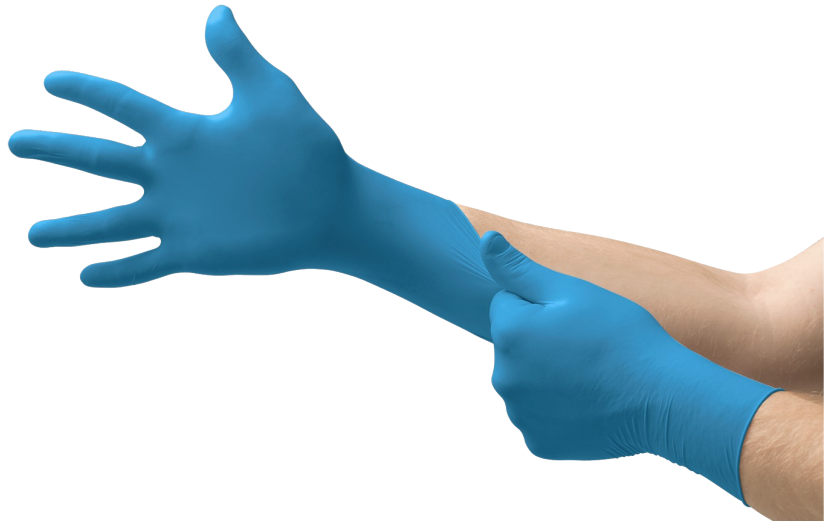

### Industries

- Life Sciences
- Chemical
- Food Processing
- Automotive
- Machinery and Equipment

### Recommended For

- Transferring liquids and solids
- Sample taking and processing
- Handling incoming goods
- Maintenance
- All food processing, applications that have food contact
- Equipment, maintenance and repair
- Cleaning of plant and machines
- Laboratory analysis

# TECHNICAL DATA SHEET

Product Information	
External Glove Surface	Textured Fingers
Audit Standards	ISO 9001
Product Certification	ASTM D6319, Category III, EN ISO 21420:2020, EN ISO 374-1:2016 Type B JKT, EN ISO 374-5:2016 Virus, FDA21 CFR 177-2600-US Food Contact Approved, EU Food Contact Approved, ISO 9001, UKCA
Packaging Overview	100 gloves per dispenser 10 dispensers per case 1000 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Thailand
Product Segmentation	Multi-Purpose
Antistatic	Yes EN1149
Silicone Free	Yes
Vulcanization Chemical Accelerators	<ul style="list-style-type: none"> <li>Zinc Dibutyldithiocarbamate (ZDBC)</li> </ul> <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

## PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	240 / 9.5		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.11 / 4.3		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.13 / 5.1		ASTM D3767,EN 420
	<b>BEFORE AGING</b>	<b>AFTER AGING</b>	
Ultimate Tensile Strength (MPa)	≥ 14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	EN 455-2

## ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
Product Code	92670070	92670080	92670090	92670100

## Performance Standards and Regulatory Compliance



## For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

### Asia Pacific Region

MY +603 8310 6688  
apac.medical@ansell.com  
CN: +86 21 38275000  
infochina@ansell.com  
JP: +813 5549 8151  
info.medical.jp@ansell.com

### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444  
F: +1 800 800 0445

### Latin America & Caribbean Region

BR +55 (11) 3356-3100  
latam.medical@ansell.com  
MX: +52 442 296 2050  
latam.medical@ansell.com  
CO: +57 1 288 3247  
latam.medical@ansell.com

### Australia

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

### Russia

Ansell PYC  
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

