


Nitrile disposable gloves that provide confident grip and durable protection

- **Enhanced grip:** Featuring our Mega Texture surface for consistent grip in wet and dry conditions
- **Tear resistance:** Robust 0.13mm/5.1mil palm thickness to resist tearing in use
- **High visibility:** Orange color to increase visibility while working
- **Durable:** Strong formulation providing durable yet comfortable hand protection
- **Food approved:** Ideal for a wide range of food handling applications

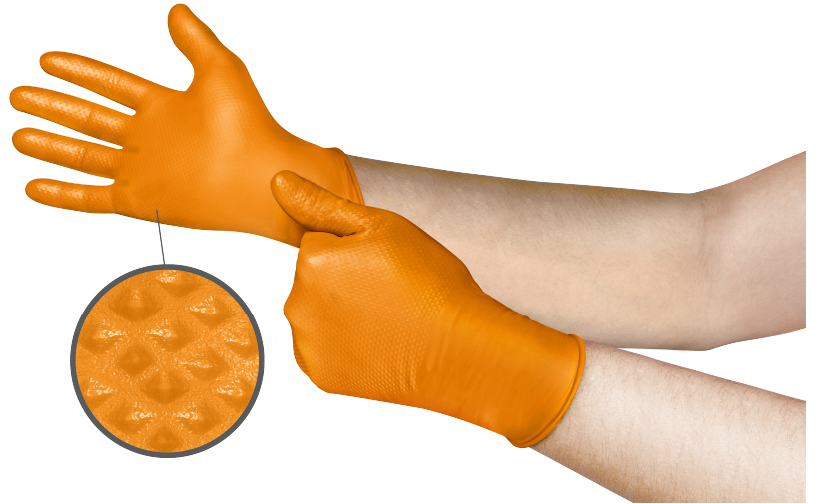

Industries

- Automotive
- Automotive Aftermarket
- Food Processing
- Machinery and Equipment
- Maintenance
- Manufacturing
- Recycling and Waste Disposal
- Transportation

Recommended For

- General Purpose Auto Aftermarket
- Food processing and handling
- Oil, fluids and filter change
- Engine transmission and repair
- Mechanical jobs
- Maintenance
- Tire rotation & changes
- Vehicle maintenance
- Assembly of parts

TECHNICAL DATA SHEET

	Product Information
Material	Nitrile
External Glove Surface	Fully Textured
Audit Standards	ISO 13485, ISO 9001
Product Certification	Arrette du 05/08/2020, EU Food Contact Approved, EC 2023/2006, ASTM D6319, CE 0493, EN ISO 21420:2020, EN ISO 374-1:2016+A1:2018 Type B JKPT, EN ISO 374-5:2016, FDA21 CFR 177-2600-US Food Contact Approved, ISO 13485, ISO 9001, ISO 18889:2019 G1, UKCA, EN 1149
Packaging Overview	100 gloves per dispenser 10 dispensers per case 1000 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Thailand
Product Segmentation	Robust
Antistatic	Yes EN1149
Silicone Free	No
Vulcanization Chemical Accelerators	Zinc Dibutyldithiocarbamate (ZDBC) Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	240/9.45		ASTM D6319,ASTM D3767
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1,EN 374-2
Palm Thickness (mm/mils)	0.13/5.1		ASTM D6319,ASTM D3767
Finger Thickness (mm/mils)	0.16/6.3		ASTM D6319,ASTM D3767
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	≥ 14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥500	≥400	ASTM D412 & D573
Force at break (N)	≥6	≥6	EN 455-2

ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93256070	93256080	93256090	93256100	93256110

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region Ansell Healthcare Europe NV T: +32 (0) 2 528 74 00 F: +32 (0) 2 528 74 01 Asia Pacific Region MY: +603 8310 6688 apac.medical@ansell.com CN: +86 21 38275000 infochina@ansell.com JP: +813 5549 8151 info.medical.jp@ansell.com	North America Region Ansell Healthcare Products LLC T: +1 800 800 0444 F: +1 800 800 0445 Latin America & Caribbean Region BR: +55 (11) 3356-3100 latam.medical@ansell.com MX: +52 442 296 2050 latam.medical@ansell.com CO: +57 1 288 3247 latam.medical@ansell.com	Australia Ansell Limited T: +61 1800 337 041 F: +61 1800 803 578 Russia Ansell PYC Ten. +7 495 258 13 16
---	--	--

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

