


Extra long gloves offering reliable performance and chemical splash protection

- **Extended protection:** These long 355mm gloves provide extra forearm protection
- **Comfort and durability:** Strong, comfortable nitrile material resists tearing and protects in the event of chemical splashes
- **Easy donning:** An extra wash during manufacturing makes these gloves ultra-smooth for easier donning, doffing and double gloving
- **Reduced allergy risk:** Manufactured without accelerators, helping to protect users from Type IV skin allergies
- **Secure grip:** Fully textured design enhances grip in laboratory, food-processing and other applications
- **Smart packaging:** Packaged in polybags to minimize contamination risks

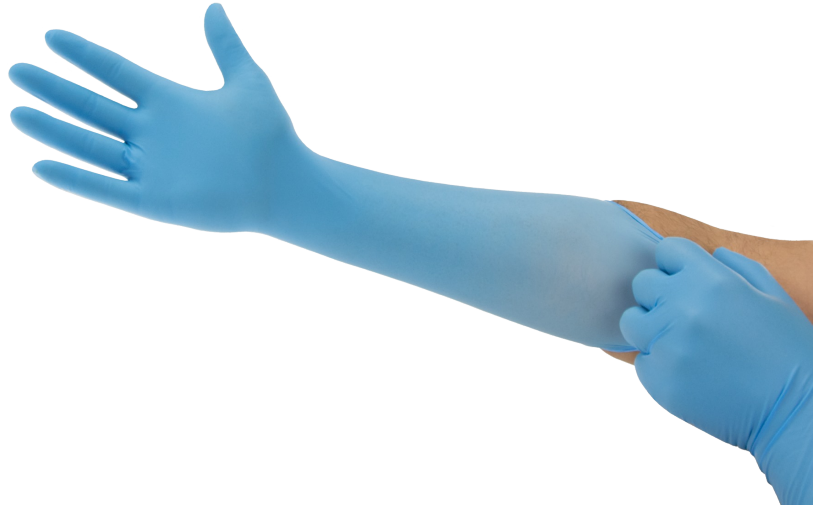

Industries

- Electronics
- Food Processing
- Industrial
- Janitorial / Sanitation
- Life Sciences
- Manufacturing
- Recycling and Waste Disposal

Recommended For

- Blending, compounding materials
- Food processing and handling
- Handling of tools
- Handling of paint/glue guns and sprayers
- Laboratory analysis
- Maintenance and equipment clean up
- Chemical Handling

TECHNICAL DATA SHEET

	Product Information
External Glove Surface	Fully Textured
Audit Standards	ISO 13485, ISO 9001
Product Certification	ASTM D6319, ASTM D412, ASTM D6124, Category III, EU Food Contact Approved, EC 2023/2006, EN ISO 21420:2020, EN ISO 374-1:2016 JKT, EN ISO 374-5:2016, EN 421:2010, FDA21 CFR 177-2600-US Food Contact Approved, ISO 13485, ISO 9001
Packaging Overview	50 gloves per polybag 10 polybags per case 500 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Malaysia
Product Segmentation	High Risk
Antistatic	Yes EN1149
Silicone Free	Yes


PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	355 / 14		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.17 / 6.7		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.20 / 7.9		ASTM D3767,EN 420
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	≥14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	EN 455-2

ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93263070	93263080	93263090	93263100	93263110

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region
Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region
MY +603 8310 6688
apac.medical@ansell.com
CN: +86 21 38275000
infochina@ansell.com
JP: +813 5549 8151
info.medical.jp@ansell.com

North America Region
Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region
BR +55 (11) 3356-3100
latam.medical@ansell.com
MX: +52 442 296 2050
latam.medical@ansell.com
CO: +57 1 288 3247
latam.medical@ansell.com

Australia
Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia
Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

